


Dry Contact,RS485 & RS232 Wiring Map:

Line	1	2	3	4	5	6	7	8
Function	RS485-B RS232-GND	RS485-A RS232-TXD	STOP	UP	DOWN			COMMON LINE

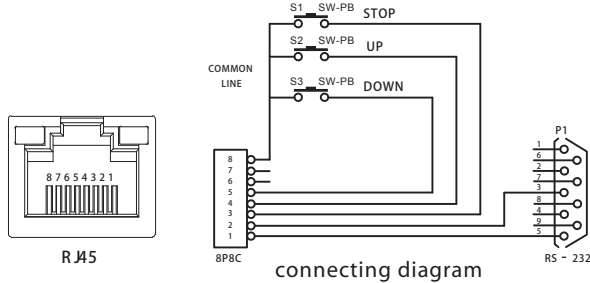

RS485/RS232 control protocol:


- Baud Rate: 2400
- Data Bits: 8
- Stop Bits: 1
- Parity: None

Hex command:

- Screen UP: ff ee ee ee dd
- Stop: ff ee ee ee cc
- Down: ff ee ee ee ee

Learning address code instruction:
FFXXXXXAA
(XXXXXX are hexadecimal characters except E and 5)

Cancel address code instruction:
FFXXXXXA6

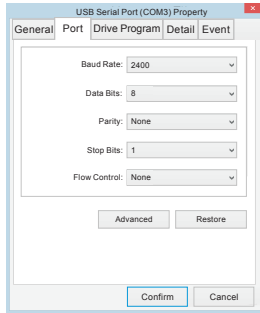

Note:

- When setting RS232 or RS485, if the screen is not able to operate as it is, please switch position of No. 1 and No. 2.
- The electric resistance of return circuit is less than 20
- Do not do wiring nearby interference sources.

Setting for Up and Down Limited Positioning for Motor:

- The limited positioning of motor has been defaulted when EX-factory, it is not allowed to reset.

Screen: Voltage AC220-230V/50/60HZ, 1.5Amp, power 60watts.
RF remote(F): Voltage 3V, use CR2450*1 battery.
Radio Frequency 868Hz, maximum control distance 15m.

Grandview

Protecting your Screen:


To ensure long lasting viewing enjoyment keep the screen rolled up when not in use. Check both the front and back surfaces before retracting into the case to make sure it is free of dust, dirt, insects or other foreign matter. Use a soft brush or cloth to lightly remove any foreign particles.

Cleaning your Screen:

Use warm water with a mild detergent to remove any marks on the surface or screen casing (only dab, do not rub). Immediately dry the screen with a soft cloth or towel. Do not leave it to air dry.

Never use any solvents, chemicals or abrasive cleaners on the screen surface as they can permanently damage the screen surface.

Grandview

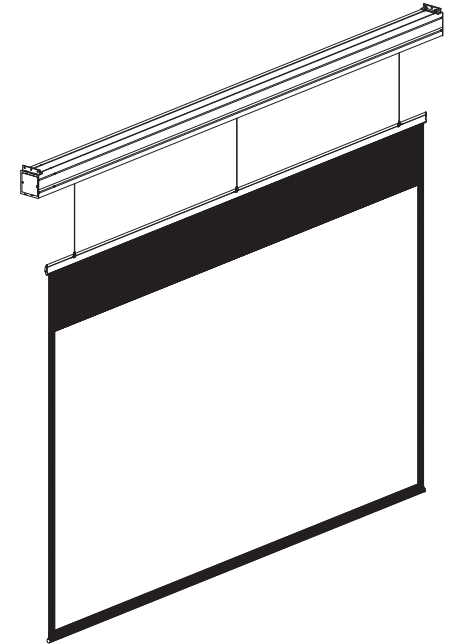

User Manual for SkyShow Series Model D2

Integrated Motorized Screen
Suitable for Model Named SK-MFxxxD2
Caution:
Please remove all the stickers before operate the screen.

Guangzhou Grandview Crystal Screen CO., Ltd

No.43 building, South national trade avenue, Hualong town, Panyu district, Guangzhou City, Guangdong Province, CHINA.

For information please go to www.grandviewscreen.com or call 86 (020) 84899499

