









Wall Mount



Ceiling Mount






## Operation

### 1. Manual Switch

2. Remove the nylon strap under the low bar, and ensure the low bar can not get stuck with casing.
3. Connect power (rated voltage)  
Turn the switch to position " — " to lower the screen; it will come down slowly. When it is all the way down, it will stop automatically

Turn the switch to position " — " to lower the screen; it will go up into the metal casing. When it is all the way up, it will stop automatically .

To stop any time while the screen is in motion, turn the switch to 0



3

### Fixed installation for ceiling

1. Install hanger to the end cap of casing via M8x12 screws (note: use the washer for the M8x12 screws) (figure 1-2)




figure 1





figure 2


2. Install the casing (include hangers) to ceiling via wood screws or tapping screws (not accessories)

Diagram for fixing on ceiling

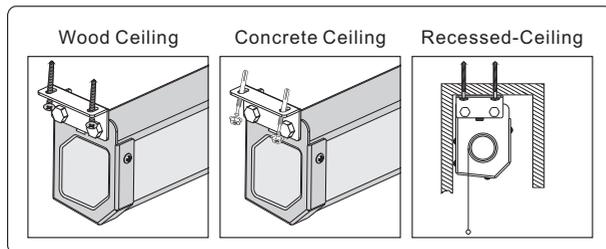

### Attention:

- > Please make sure there is no dust or dirt on the fabric surface before rolling it back to the casing
- > The recommended working time is less than 50 seconds. The motor will enter overheating protection status and stop working for every continuous 4 minutes operation, user would need to wait for a while until the motor cool down before operating again.
- > There is no lube needed for the motor. Please be noticed that the appropriate setting is optimized which requires no further adjustment, please consult the after sales team before adjusting the limits.

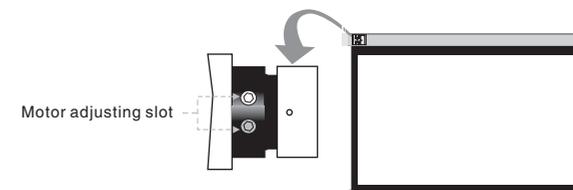

4