
Installing the black acoustic mesh

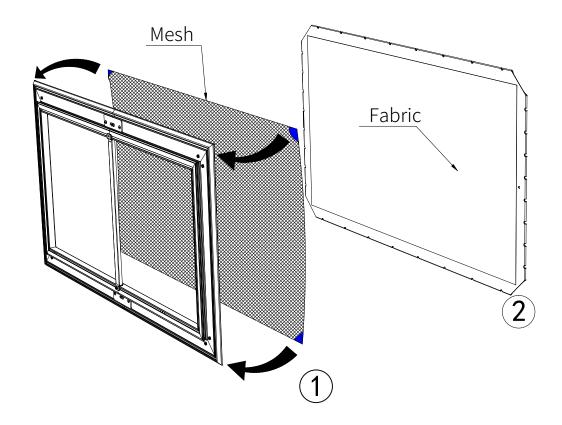

Installation method of black acoustic mesh

After splicing the frame, please hang the four corners of the black acoustic mesh on the four corners of the frame and adjust the four edges so that it completely covers the aluminum profile of the projection before installing the sound-transparent fabric.

Purpose of laying the mesh

It can effectively block the light from being projected onto the reflective aluminum profile, which makes the visual effect better.

